

# Indirector Series™

## Sharpe Size D (24") Asymmetrical Floodlight

### Remote or Integral Ballast

#### APPLICATIONS

- Ideal for Airports, Gymnasiums, Sports Complexes, Atriums, Churches, Schools, Malls, Libraries and Retail Spaces.

#### CONSTRUCTION

- Extruded aluminum housing, door frame, splice chamber/ballast housing.
- Solid, perforated or "Window" optical chamber.
- Die cast aluminum arms.
- Heavy duty die formed end plates.
- Tempered glass lens.
- No exposed fasteners.
- Matte White polyester powder coated finish standard.
- Optional designer finishes available. See inside back cover of ExceLine catalog.

#### OPTICS

- Highly specular segmented/hammer tone reflector.
- Choice of 35° (from horizontal) peak angle distribution.
- Up to 10% direct component on perforated and "Window" housings.
- Horizontal or below lens positioning.
- Internal reflector adjustment.<sup>1</sup>
- Lockable adjustable arms.
- Lockable adjustable optical assembly.

#### ELECTRICAL

- Remote ballasts standard: 120/277V HPF Electronic.
- Integral ballasts optional: 120/277V HPF Electronic.
- No exposed wiring.

#### MOUNTING

- Wall or ceiling mounted.
- Quick mounting plate with built-in level.
- Integral splice chamber.

#### WARRANTY/LISTINGS


- UL 1598 damp location/optional wet location.<sup>6</sup>
- Published five year limited warranty.

OPTIONS & ACCESSORIES — SEE END OF THIS SECTION.


PHOTOMETRICS — SEE REVERSE SIDE.



2 x 42 to 57 Watt (HF) PLT Compact Fluorescent

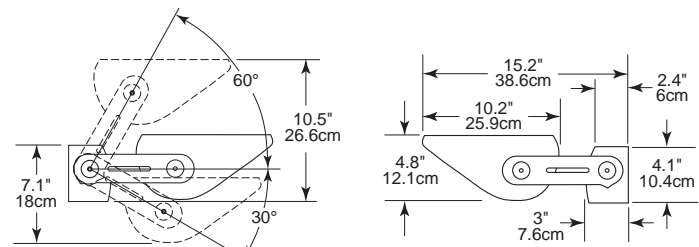

Remote Ballast



#### ORDERING GUIDE EXAMPLE: SPD253HFWM-6

| Style                                 | Size  | Wattage                        | Distribution                     | Source              | Finish   | Options   | Voltage   |
|---------------------------------------|-------|--------------------------------|----------------------------------|---------------------|--|---|-----------|
| SP                                    | D     | 25                             | 3                                | HF                  | WHM  | -   | 6         |
|                                       | D     |                                | 3                                | HF                  |  |   | 6         |
| SH= Sharpe                            | D=24" | 24= 2x42(PLT)<br>25= 2x57(PLT) | 3=35°<br>Peak Angle <sup>2</sup> | HF <sup>3,4,5</sup> | WHM=Matte White<br>TM= Dark Titanium<br>AL= Aluminum<br>(Paint)<br>NA=Natural Anodized<br>(Paint)<br>BKX=Black Sandtex | IB=Integral Ballast<br>WL=Wet Location <sup>6</sup><br>See options/acc's end of this section. | 6=120/277 |
| SP= Sharpe<br>Perforated <sup>1</sup> |       |                                |                                  |                     |  |   |           |
| SW=Sharpe<br>Window <sup>1</sup>      |       |                                |                                  |                     |  |   |           |

Product information is subject to change without notice.

<sup>1</sup>Internal reflector not adjustable on perforated or "Window" units.

<sup>2</sup>Peak angles may vary. Consult photometry on reverse side.

<sup>3</sup>Voltage is 6(120/277).

<sup>4</sup>Maximum lamp to ballast distance is 15'.

<sup>5</sup>Single switching only.

<sup>6</sup>Wet location limited to wall mounting, lens up orientation.