

SkyLyter Bullet Series

Architectural PAR38/R40 HID Bullets

APPLICATIONS

- Safety, Security, Accent Uplighting, Facade, and Landscape Lighting, Flagpoles.

CONSTRUCTION

- Precision die-cast aluminum housing.
- Corrosion resistant Duraplex II Wrinkle Bronze polyester powder coated finish.
- Optional designer finishes available. See page 391 for color samples.

ELECTRICAL

- Deluxe glazed porcelain 4KV socket medium base plate screw-shell and spring-loaded center contact.

OPTICS

- Heat and shock tempered glass lens.
- Die-cast extender with tempered glass lens sealed with RTV.

MOUNTING


- Surface mounting only.
- Ballast box should be mounted on concrete pad with suitable barrier or spacing between housing and pad to prevent corrosion.
- Lower section of box has one hole on each of four sides and two on bottom tapped 1/2" NPS for surface or through-wall conduit.

WARRANTY/LISTINGS



70 to 175 Watt (MA) Metal Halide
70 to 150 Watt (MM) Mercury Vapor

Dimensi

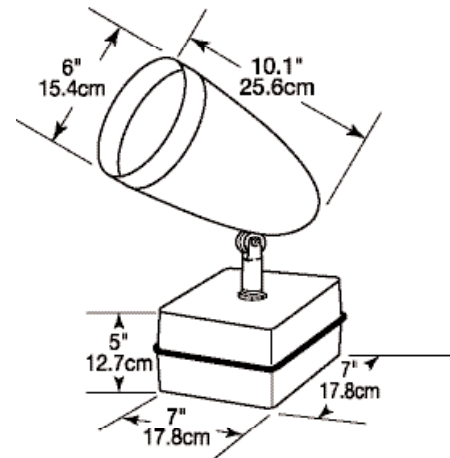

ORDERING GUIDE EXAMPLE: SL3870MAGRY

SL	38	70	MA	GRY
SL	38			
Prefix	Size	Wattage	Source	Finish
SL	38	70 100 150 175 ¹	MA MM	GRY=Wrinkle Gray BRW=Wrinkle Bronze BLK=Wrinkle Black GRW=Wrinkle Green WHW=Wrinkle White

Accessories

- P150A 120V Light leveler photocontrol
- P150M 208-277V Light leveler photocontrol
- P150E 480V Light leveler photocontrol
- P150F Multi-tap Light leveler photocontrol

Product information is subject to change without notice.

¹Available in Metal Halide only.