SpotLyte Par38 Series

Line Voltage Incandescent Pencil Beam

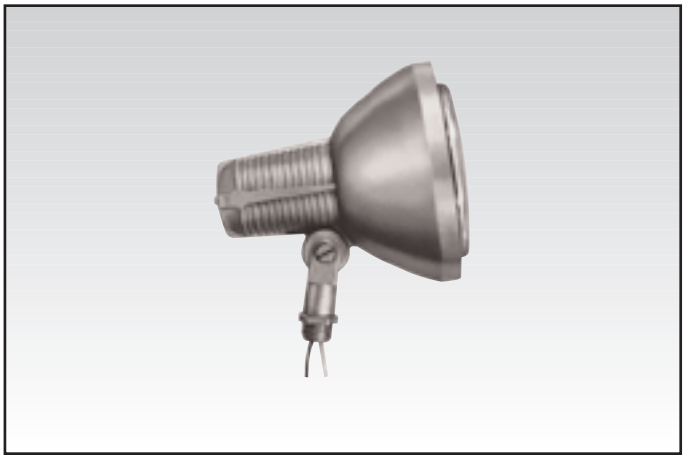

150 and 250 Watt PAR38

Dimensions

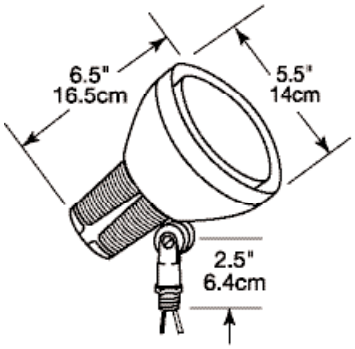

APPLICATIONS

• Flag Poles, Billboard, Facades, Church Steeples, Columns,
Clock Towers, Stained Glass.

CONSTRUCTION

• Precision die-cast aluminum housing.
• Natural Aluminum finish standard.
• Optional designer finishes available. See page 391 for color
samples.
• Cast-in ribbing extends surface area for more effective heat
dissipation, longer lamp life.
• Clear heat-tempered glass lens, gasketed.

ELECTRICAL

• Units are pre-wired with porcelain socket and silicone gasketed for weather resistance.

OPTICS

• Controlled by lamp type distribution.
• Ranges from wide flood (25° x 50°) to very narrow spot (10° x15°).
• Enclosed units equipped with shock and heat resistant tempered glass.

MOUNTING

• 1/2" NPT threaded die-cast arm, locknut pre-installed, pre-lubed to facilitate mounting.
• Cast-in quadrants with serrated teeth lock unit in place once
aimed.

WARRANTY/LISTINGS

c UL

ORDERING GUIDE EXAMPLE: SP40BRW

Prefix	Series	Finish
SP	40	BRW
SP		
SP	40 Open	**BRW=**Wrinkle Bronze **BLK=**Wrinkle Black **WHT=**White **Blank=**Natural Aluminum

Accessories

207 Wire Guard

Product information is subject to change without notice.