

Type No. _____

Catalog No. _____

Job. Name _____

ProTector™ Series

13" Shallow Round Wall-Mounted Vandal-Resistant Lighting Fixture

APPLICATIONS

- The ProTector Series is ideal for high-traffic areas requiring architectural wall-mounted vandal-resistant luminaires.

CONSTRUCTION



- Precision die-cast 360 alloy marine-grade aluminum back plate with cast-in mounting knock-outs.
- Finished in Duraplex II polyester powder coat (back-plate only).
- One-piece injection-molded and UV-stabilized polycarbonate face with snap-in, interlocking lens provision.
- Color molded into the polycarbonate face for durable, scratch-resistant finish.
- Locking recessed set screw at the 1:00 o'clock position is unobtrusive, securely locking the face and lens to the cast housing.

ELECTRICAL

- Die-cut neoprene rubber gasket provides added protection against elements between back casting and mounting surface.
- Silicone rubber gasket seals optics/face styles to outer rim of back casting. Also acts as a shock absorber providing additional support against breakage.
- Compact fluorescent units equipped with an electronic HPF ballast with 120-277 voltage sensing capability.

OPTICS

- Lens is a one-piece, injection-molded, UV-stabilized polycarbonate.
- Internal prisms re-direct the light minimizing hot spots and maximizing uniformity.
- Available in either clear prismatic or opal prismatic polycarbonate.
- Twist and seal construction locks the lens and face onto the back casting.
- Extruded silicone gasket provides a tight weather-resistant seal. The patent-pending Supplemental Impact System (SIS) provides a cushion that supports/seals the lens against the elements and also acts as a shock absorber to help reduce damage from impact to the unit face.
- HID units equipped with a precision die-form segmented reflector.
- Compact fluorescent units equipped with a high reflectance white pan reflector system.

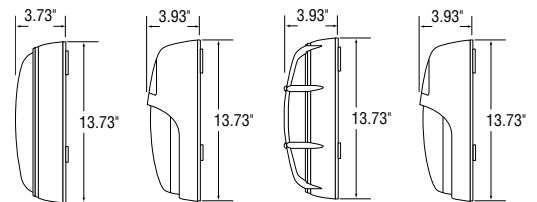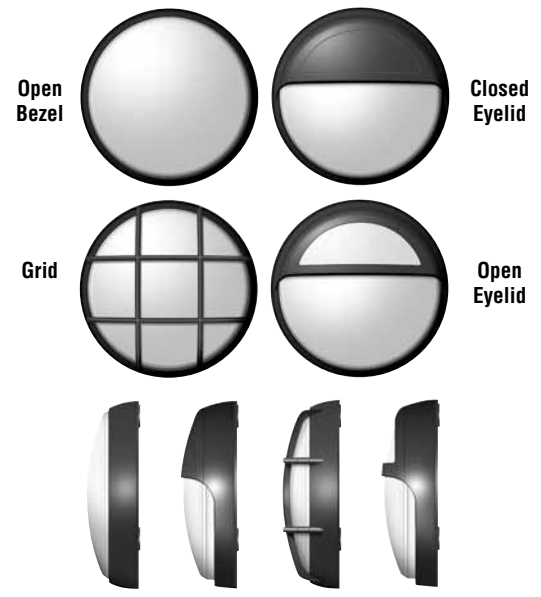

MOUNTING

- Wall-mounted units equipped with additional kick plates to direct the light down and out into a Type III pattern with a minimum 4:1 spacing ratio.

WARRANTY/LISTINGS

- "LifeLyte" limited lifetime warranty.
- UL listed for wet locations.



Ordering Guide Example: PR3SW142HFLB8ICBC1B

P	R	3	S	W	142	HF	L	B	8	I	C	B	C1B
Series	Shape	Size	Depth	Mount	Wattage	Source	Options	Base Color	Voltage	Face Style	Lens	Face Color	Insert

P = ProTector	R = Round	3 = 13"	S =Shallow	W =Wall	113 =1x13 118 =1x18 126 =1x26 132 =1x32 142 =1x42 213 =2x13 218 =2x18 226 =2x26	HF =Compact Fluorescent (HPF)	L =Lamped F =Fusing	B =Black W =White P =Bronze	8 =120-277	B =Open Bezel G =Grid E =Closed Eyelid I =Open Eyelid w/ Insert	O =Opal C =Clear	B =Black W =White P =Bronze	See reverse for details
----------------------	------------------	----------------	-------------------	----------------	--	--------------------------------------	--------------------------------------	--	-------------------	--	-----------------------------------	--	-------------------------

* Additional colors available. Consult factory.

Exceline is a Philips group brand

Product information is subject to change without notice



ProTector™ Series

13" Shallow Round Wall-Mounted Vandal-Resistant Lighting Fixture

Factory-Installed Options:

Round Series

L = Supplied with appropriate lamp

Q = Quartz auxiliary standby. Provides light after a momentary power interruption knocks out the main HID lamp. Not for use with compact fluorescent systems

F = Single- or double-fused (voltage required)



2345 Vauxhall Road - P.O. Box 129

Union, NJ 07083

800-334-2212

www.exceline.com - www.protectorseries.com

Exceline is a Philips group brand

Product information is subject to change without notice

PHILIPS